


ANALOG
AHD
HIGH DEF

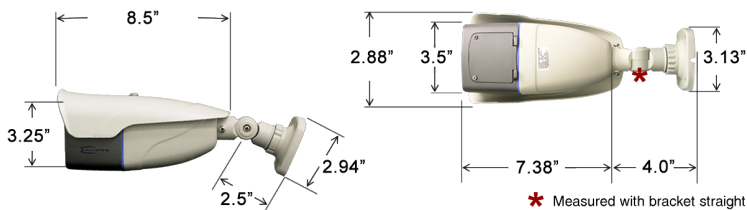

KEY BENEFITS

- 2.43 MEGAPIXEL SENSOR
- DUAL OUTPUT: AHD & ANALOG OSD
- MID RANGE 2.8-12MM VARIFOCAL MP RATED
- DROP DOWN INSTALLERS PORT
- SMOOTH CONSISTENT LONG RANGE INFRARED
- BRIGHT WHITE DETERRENT STROBE LED
- INDUSTRIAL SURVEILLANCE

Best long range radiant infrared coverage for the price. This premium quality outdoor bullet camera provides users with 1080P AHD output or 1200TVL Analog output (OSD Selectable). The built-in infrared array provides exceptionally even and consistent long-distance coverage. The varifocal lens can be adjusted quickly thanks to a weatherproof Installer Port that also conceals an auxiliary video connector for use during installation and the mini-joystick for adjusting the on-screen display (OSD) menu.

SPECIFICATIONS

| | |
|----------------------|---|
| Video Sensor | 1/3" 2.43 Megapixel sensor |
| Lens | 2.8-12mm Megapixel rated Varifocal lens |
| Resolution | Digital: 1480×1080P Analog: 960H - 1200TVL |
| IR range | 90 - 120 feet / 27-37 meters |
| IR LED | 47 IR LEDS |
| Video Output | AHD: 1080P / 960P BNC CVBS: 1.0 Vp-p Composite Signal (75 Ω) |
| Electronic Shutter | AUTO/ MANUAL /FLK |
| Scanning System | Progressive Scan |
| Minimum Illumination | 0.2 LUX (0.0 LUX IR ON) |
| 3D-DNR | OFF / ON (LOW/MIDDLE/HIGH) |
| Digital WDR | OFF / ON (Level Adjustable) (Long and short exposure) |
| OSD | Yes |
| Strobe LED | White strobe LED (enable/disable) |
| White Balance | AWB/ ATW / PUSH / MANUAL |
| Back Light Control | OFF / ON |
| Defog | Digital ON / OFF |
| TV System | NTSC |
| Housing | Aluminium alloy |
| Power Consumption | 600mA |
| Working Temperature | -10°~ to 50°C / -14° +122 °F |
| Power | 12V DC |
| Dimension(L) (H) | 11.38 " x 3.25 " (inches) / 289 x 83 (mm) |
| Weight | 2.2 (lb) / 997.9 (g) |

