
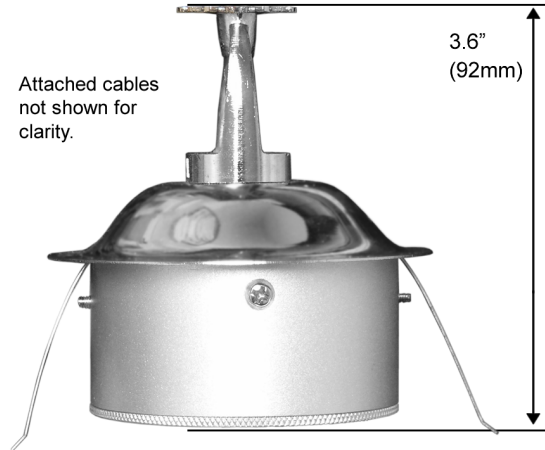


Non-Working Water Sprinkler Blends In Perfectly

They're everywhere in office buildings, community centers and other public areas, so no one ever looks twice. Even if they did they'd never think to look closer or notice the hidden pinhole camera in this fake (non-functional) water sprinkler. It looks just like the real thing and contains a 420 line color board camera. This hidden camera can help put out "fires" before they start.

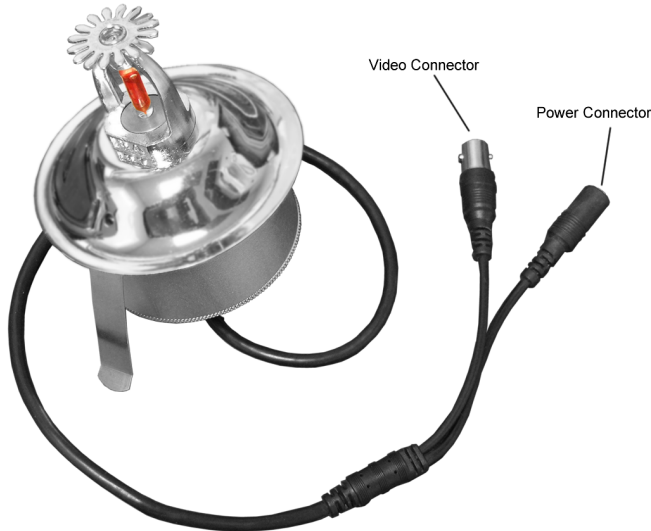


Specifications

CCTV CAMERA
Color CCD video sensor
Resolution: 420 lines (Eclipse standard rating) 460 lines (Industry standard rating)
Lens: 3.7mm f2.0 (pinhole) optical glass
Lens Angle: 90° field of view
Effective Pixels: 512h x 492v / 251k (NTSC)
Digital Signal Processing (DSP): Yes
Auto Gain Control (AGC): Yes
Minimum Illumination: 0.6 LUX
Electronic Shutter: AES (1/60 to 1/100,000 seconds)
Video Output: 1Vp-p, 75 ohms impedance, analog composite (traditional CCTV video signal format)
Sound/Microphone: No
POWER SUPPLY
12VDC @160mA nominal (sold separately)
PHYSICAL
Operating Temperature/Humidity: -10°C to 50°C 14°F to 122°F 0-90% non condensing
Dimensions: 2.6" (diameter, not including retainer flanges) x 3.6"(h) 67mm x 92mm
Housing: Chrome plated steel and aluminum
Weight: 6.6oz (187.1g)
User/Installation/Setup manual, installation kit included.

Small enough to fit in any standard drop ceiling.



Perfect for waiting rooms, store rooms and anywhere you want a hidden camera and have a drop ceiling available for installation.

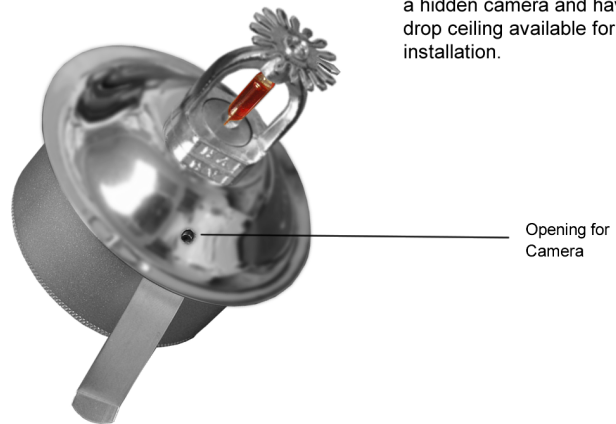

ATTENTION: This is a non-working water sprinkler - it will not put out fire or provide any water flow. CORTEX Corp. will not be held liable or responsible in any way for misuse of this product, or failure of this product to extinguish a fire.