

COR-588R

VARIFOCAL OUTDOOR TURRET w/ WIDE DYNAMIC RANGE & OSD MENU



CUSTOM LOW PROFILE BEZEL AND INTERRUPTED LENS MEAN ABSOLUTELY NO IR GLARE OR HAZE

- Multiple features provide true day/night operation w/o IR
- Tolerant of higher DC voltage
- Preset for professionals
- Anti-color rolling technology
- Auto-tracking white balance
- Anti-vandal: cable feed-through- bracket

Specifications: COR-588R

Resolution: 650+ TV lines
Video Sensor: 1/3" color digital GEN III CCD sensor
Advanced video processing chipset w/OSD & DSP
Video Format: Available with NTSC or PAL output
Effective Pixels: NTSC - greater than 379k
Video Signal Output: composite, 1Vp-p @ 75 Ohm impedance
Varifocal Lens: 4-9mm, F1.6, IR optimized
Minimum Illumination: 0.0 LUX with Infrared ON
WDR, AWB, BLC, AGC, AES: Configuration through OSD menu
Electronic Shutter: NTSC - 1/60 to 1/100,000 sec. PAL - 1/50 to 1/100,000 sec.
New Generation High Power IR with automatic switching
Infrared Source: 42 LEDs, 850nm wavelength
Infrared Range: Up to 80' or more
Power: 12VDC @ 85mA nominal (~400mA with IR on)
DC Voltage Tolerance, safe from 10VDC to 17VDC
Operating Temperature: -10° to +50 Centigrade -14° to +122 Fahrenheit
Housing: Heavy duty vandal resistant aluminum alloy, 3D orbital bracket
Dimensions: Camera - 4.75" diameter x 4.25" tall
Weatherproofing: Outdoor rated (IP66)


- ANTI-VANDAL ALL METAL CONSTRUCTION
- 4-9mm VARIFOCAL LENS
- EXTERANL CONTROLS
- OSD MENU WITH MINI-JOYSTICK FOR PROGRAMMING
- 3D ORBITAL BRACKET

- Anti-vandal: Heavy duty metal construction
- Digital wide dynamic range
- High Light Compensation eclipses bright lights
- Backlight compensation
- Dynamic noise reduction improves images in motion
- Automatic gain control reduces noise, improves fidelity



RS485 Controller
Attach to camera to program OSD menu, then remove for added security.

MULTI-LEVEL ON-SCREEN DISPLAY MENU

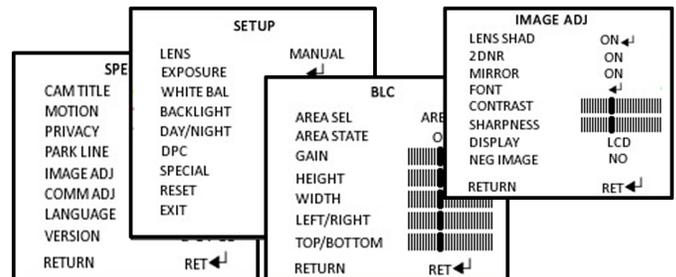

COR-588R

