

COR-SP380I

HIGH INTENSITY OUTDOOR PTZ w/ LONG RANGE INFRARED

LONG RANGE IR LEDS | SMALL SIZE | ANTI-VANDAL ANTI-TAMPER CONSTRUCTION | MULTIPLE TOURING & PRESETS




Big Power In A Small Package




MODEL	ECL-SP380I
VIDEO SENSOR	1/3" color Sony™ CCD
VARIFOCAL LENS	5.5-55mm
RESOLUTION	700 TV-Lines
EFFECTIVE PIXELS	976(h) X 582(v) (568k)
SIGNAL PROCESSING	Sony™ Effio™ DSP
MINIMUM ILLUMINATION	Color: 0.01, B/W: 0.001 LUX
HORIZ. ROTATION SPEED	180°/Sec.
TILT ROTATION SPEED	120°/Sec.
HORIZ. ROTATION RANGE	360° continuous
TILT ROTATION RANGE	93°
AUTO-FLIP	yes
IR CONTROL	Auto/Manual
IR ILLUMINATION ON	1-15 levels, selectable
IR OUTPUT POWER	5 levels, selectable
IR STANDBY TIME	15-20 sec., selectable
IR SOURCE	6 high-intensity LEDs
IR RANGE	150+ feet (nominal)
TOURS	3 groups
PRESETS	220
POWER-ON ACTION	Home or Tour
360° SCAN SPEED	Programmable to max. speed
DWELL	2-60 sec., selectable
SPEED BETWEEN PRESETS	Programmable
PARK POSITION	yes
COMM. PROTOCOL	Pelco-D, Pelco-P
COMMUNICATION	RS485
BAUD RATE	1200/2400/4800/9600bps
DOME ID	1-250
PRIVACY MASK	yes
FOCUS	Auto-focus & remote manual focus
BLC	yes
PICTURE FREEZE	yes
LIGHTNING RESISTANCE	up to 59,999V transient
TEMPERATURE STABILIZATION	Internal heater
CONDENSATION CORRECTION	Internal blower
POWER	24VAC (adapter included)
POWER CONSUMPTION	≤15W



10X
Optical Zoom

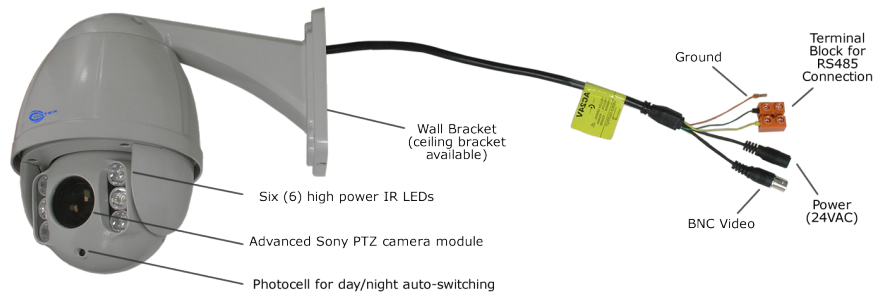

An example of a simple installation setup is shown at right, using a pendant mount bracket, a color monitor and an COR-CN530 PTZ controller module.

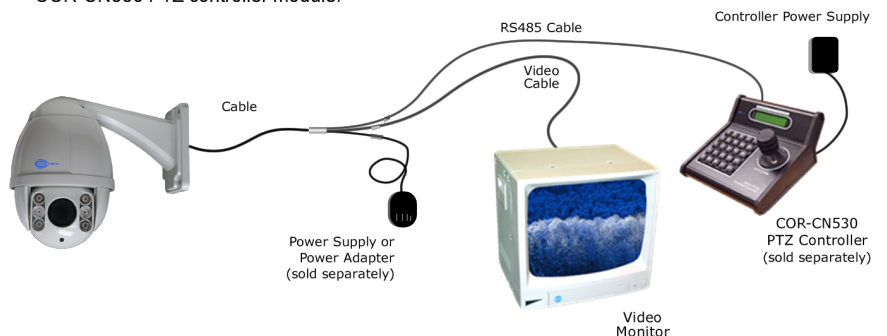

COR-SP380I

