



NUBIX8HDX

HYBRID DVR-NVR FOR 960H IP CAMERA SURVEILLANCE NETWORKS

Real Time IP Megapixel, D1 Recording

Designed for hybrid surveillance networks that have IP megapixel high definition CCTV cameras and traditional analog cameras, Nubix HDX hybrid DVRs work well with both types of cameras. Pentaplex operation lets you work smoothly throughout the day no matter what security tasks you need to perform, even if you are doing the tasks remotely.

The front panel controls are easy to identify and use. A shuttle ring/jog disk aids tasks like searching through video during playback, making fast forward and rewind intuitive. Other usability enhancements include Smart Search, which helps you find important parts of recorded video faster and easier, and ezBurn, which simplifies the process of exporting video after you've found the important parts (usually security incidents).

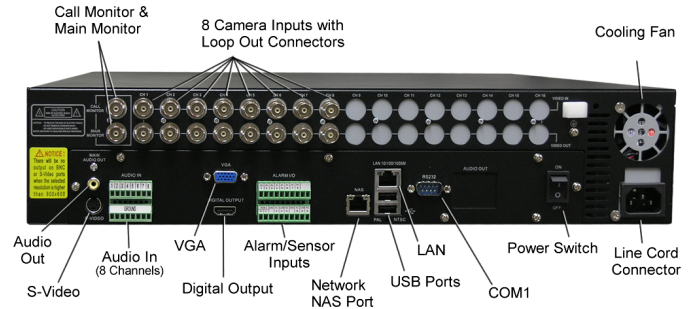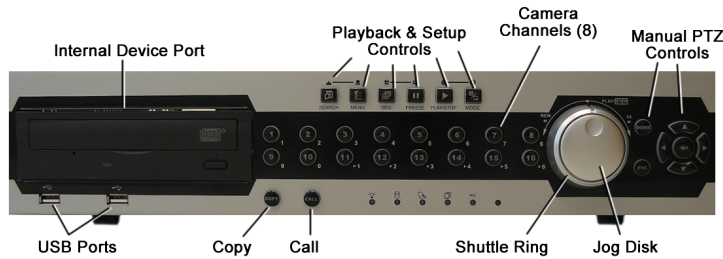

General Specifications

Selectable Video Compression: H264, MPEG4, MJPEG
Analog Video Input: 8 channels (BNC)
IP Video Input: up to 8 channels, megapixel input compatible with high definition CCTV IP camera raw data recording with no data loss
Live Picture Refresh Rate: 480 images per second Real Time
Record speed/resolution
H264 NTSC 720x480: 240 ips* Real Time @ D1
Record Quality Settings: 8 selectable
Recording Modes: Schedule, Alarm, Motion Detection
Pre-Alarm Recording: 1 to 30 seconds
Data Protection: Yes (programmable)
Video Playback Format: Switch selectable - NTSC or PAL
Video Monitor Outputs: 1 call monitor composite (BNC), 1 S-video, 1 VGA, 1 HDMI
Network Connectivity: RJ45 Ethernet conn. 10/100/1000Mbps
Remote Operations: Live camera video, playback, record, setup system, PTZ, backup
Serial Connectivity: RS232C (9- pin D) & RS485 (terminal block)
PTZ Protocols: Pelco, Pelco D, Fastrax2, Panasonic
Alarm Inputs: 8 (TTL), terminal block connections
Alarm Detection: NO, NC, programmable
Alarm Relay Output: 2 terminal block, 3.0A/30VDC or 3.0A/125VAC
Motion Detection: Grid (sensitivity level adjustable)
Video Loss Detection: selectable
Audio Input: 8
Audio Output: 1 line-out
Audio Compression: ADPCM, G.726
Audio Bit-Rate: 8KB/s, per channel
Storage: 4 SATA Devices (3 HDD & 1 DVD R/W or 4 HDD)
Internal Cartridge or DVD R/W: optional
External Storage: HDX Store™ (Gigabit LAN)
Export/Backup: USB 2.0 (x4) drive support
User Controls: mouse, front panel buttons or IR remote control
Programming/Setup Menu: Multilingual On-screen display (OSD)
Operating system: Linux



HDX CMS Camera Management System

Our powerful HDX CMS software lets you connect to dozens of cameras, analog and IP-based, collecting surveillance perspectives from anywhere in the world. As an NVR it gives you a central location for viewing all the cameras in your network. You can always use a PC, connected to the internet, to record video at any time from any location in the world (assuming nothing prohibits such a connection). Updates always free from our support site.

Additional software: Free HDX CMS software, downloadable from our DVR support site, allows fast monitoring of dozens of cameras across your network or around the world. Use your PC to record video at any time from any camera, IP- or analog-based.
Common Task Enhancements
Freeze Button: Front panel mounted, freezes video during playback or live operation.
Smart Search: User selects start/end time, channel, area for search, sensitivity and threshold and number of segments in their search time.
ezBurn: Fast and easy export video to a USB flash drive or writable DVD. Find your video segment, mark start, mark end, export.
Optional Models
Nubix 8HD Security DVR
Nubix HD series offer virtually the same features as the Nubix HDX series except for the following difference.
<ul style="list-style-type: none"> Simultaneous Real Time recording on all 8 channels in CIF resolution, while the Nubix HDX offers simultaneous Real Time recording in D1 resolution on all 8 channels. The Nubix HD CAN record in Real Time in D1 resolution, but NOT on all 8 channels simultaneously.

* IPS = Images Per Second (same as Picture Per Second or Frames Per Second)

Power & Physical Specifications

Power: 100~240VAC, 50-60Hz, 100W (manual select)
Operating Temperature: 32° ~ 104°F (0° ~ 40°C)
Operating Humidity: 0% ~ 90%
Dimensions: 17.3"(w) x 3.5"(h) x 16.3"(d) 440mm(w) x 90mm(h) x 413mm(d)
Weight: 15.4lb (7Kg) with DVD R/W drive installed

NUBIX8HDX

